


**Figure 6-52
TYPICAL OBJECT MARKERS
(Type N, P and R)**

POLICY

'N' Marker

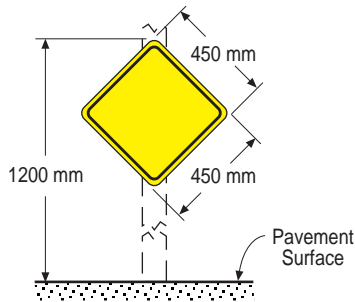


- 'N' Marker (Yellow) is used below and on the same post with a W56 or W57 Arrow sign to warn of an abrupt turn. Background may be either yellow retroreflective sheeting or yellow non-reflective background with 9 each, yellow acrylic cube-corner retroreflective elements.

- 'N' Marker (Red) is normally used below and on the same post with the W31 END sign to mark the end of a street or highway. Background may be either red retroreflective sheeting or red non-reflective background with 9 each, red acrylic cube-corner retroreflective elements.

- 'N' Marker (Orange) is used in a construction zone in the same manner as the Yellow - 'N' Marker. Background shall be orange retroreflective sheeting.

'P' Marker

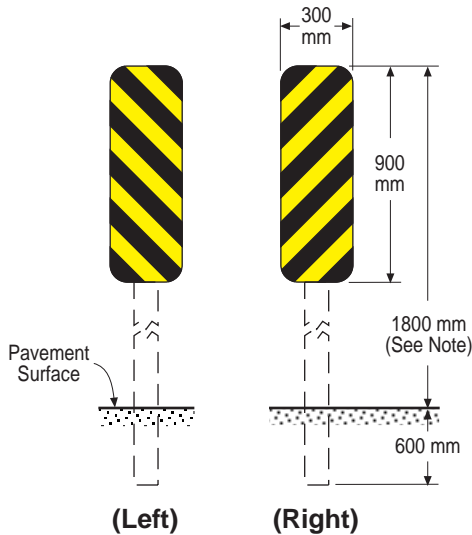


'P' Marker is used to mark an object in a paved area, within 2.44 m of the traveled way, where traffic may pass on only one side of a fixed object. Background shall be yellow retroreflective sheeting with alternating black opaque stripes.

In a construction zone, this marker has a white retroreflective background with alternating orange retroreflective stripes.

Note:

When placed on, or in front of, a crash cushion, this height should be approximately the same height as the crash cushion.

'R' Marker

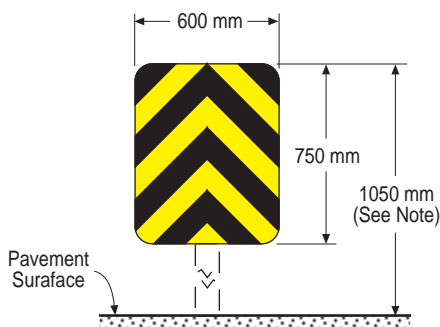

'R' Marker is used to mark an object within the roadbed where traffic may pass on either side of a fixed object. Background shall be yellow retroreflective sheeting with alternating black opaque stripes.

In a construction zone, this marker has a white retroreflective background with orange retroreflective stripes.

Note:

The bottom of the marker is normally mounted 0.3 m above the pavement surface.